TAURUS TAURUS TAURUS TAURUS TAURUS TAURUS

GENERAL SAFETY, OPERATING INSTRUCTIONS AND LIMITED WARRANTY

READ CAREFULLY BEFORE USING YOUR FIREARM

Important: Keep this manual with your firearm.

The information contained in this manual is useful, both for beginners and experienced shooters. In addition to important information about the function, cleaning and care of the firearm, this manual contains instructions that may be very helpful in shooting safely.

The most important rule of safe firearm handling is always keep the muzzle pointed in a safe direction!



TaurusUSA.com

🚺 /TaurusUSA 🎽 @taurususa 🕜 /TaurusUSA

Supplement Instruction manual is for the following Taurus® Models.

410 PD POLY

PROTECTOR POLY

CONTENTS

Firearm Safety6	
Get To Know Your Revolver12	
Ammunition	
Operating Instructions22	
Care and Maintenance24	
Exploded View	
Taurus® Service	
Limited Warranty 30	



The safety warnings in this booklet are important. By understanding the dangers inherent in the use of any firearm, and by taking the precautions described herein, you can safely enjoy your Taurus[®] firearm. Failure to follow any of these warnings could result in serious injury to you or others, as well as severe damage to the firearm or other property.

NOTES

Intentionally left blank

SIGNAL WORDS AS DEFINED BY ANSI Z535.6 AND Z535.4 STANDARDS.

	DANGER indicates a hazardous situation which, if not avoided, will result in death or serious injury.
	WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury.
	CAUTION indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.
NOTICE	NOTICE is used to address practices not related to physical injury.

FIREARM SAFETY

<u> WARNING</u>

When a firearm discharges, the bullet or shot can strike a person, resulting in death or serious bodily injury.

The three basic keys to safe handling of firearms:

1. KEEP YOUR FINGER OFF THE TRIGGER UNTIL YOU ARE READY TO FIRE. If you maintain good trigger discipline, it is extremely unlikely the firearm will fire.

2. KEEP THE MUZZLE POINTED IN A SAFE DIRECTION. Even if the firearm discharges, if the muzzle is pointed in a safe direction, no one will be injured.

3. NEVER TRUST ANY SAFETY MECHANISM. If you adopt the attitude that you will not trust any safety mechanism, you will be vigilant about keeping your finger off the trigger and keeping the muzzle pointed in a safe direction.

WARNING - KNOW YOUR TARGET

Never fire at targets at close range. Ricochets can and do cause death or serious bodily injury. What constitutes "close range" depends on many factors including target material, bullet caliber and angle of impact.

KNOW WHAT IS BEHIND YOUR TARGET. Unless you are shooting into a bullet trap designed to capture the type of ammunition you are firing, projectiles may pass through the target and strike anyone or anything beyond. Bullets can travel miles. ALWAYS WEAR HEARING PROTECTION. Firearms are loud. The sound they generate is greater indoors. Repeated exposure to loud noises can cause deafness. Hearing protection is rated by decibel reduction. Look for "dB" reduction of 30 or more when purchasing ear protection. Modern ear protection can allow normal hearing until the sound from the discharge reaches the ear. Significant protection can be achieved by layering hearing protection, for example, wearing 30 dB rated foam plugs along with 20 dB rated ear muffs.

ALWAYS WEAR EYE PROTECTION. In normal operation, firearms emit hot high-velocity gases, particles and metal. These materials flying into your eye can cause blindness. Protect your vision with proper eye protection. Any eye protection may be better than none, but look for ANSI Z87.1-2003 certified eyewear for the best protection.

NEVER HANDLE FIREARMS WHILE UNDER THE INFLUENCE OF DRUGS OR ALCOHOL. Firearms are dangerous. Handling firearms while impaired by drugs or alcohol is foolhardy and can result in serious injury or death. This warning includes prescription drugs that contain a warning about using machinery or driving while taking the medication.

MODIFIED FIREARMS ARE DANGEROUS, AND USE CAN RESULT IN SERIOUS INJURY OR DEATH.

"Trigger jobs," polishing original components or installing aftermarket parts can cause a firearm to function in ways different than intended. Some such work may also be illegal.

DAMAGED FIREARMS ARE DANGEROUS, AND USE CAN RESULT IN SERIOUS INJURY OR DEATH.

Repairs should always be made by a qualified gunsmith or by a factory-authorized repair site. Work done by those unfamiliar with the design can cause a firearm to function in ways different than intended.

NEVER ATTEMPT TO DISASSEMBLE OR CLEAN A LOADED FIREARM. DOING SO CAN RESULT IN SERIOUS BODILY INJURY OR DEATH. How often have we heard "But it went off while I was cleaning it!" or, "I did not know it was loaded!" or, "It was jammed, and I tried to take it apart!"?

IF A FIREARM GOES OFF, THERE WAS A ROUND OF AMMUNITION IN THE CHAMBER. Period. "Clear" (or empty) the firearm of all ammunition before disassembling or cleaning. As owner of your new Taurus[®] firearm, you are responsible for (1) keeping your finger off the trigger, (2) pointing the muzzle in a safe direction, (3) opening the cylinder by pressing the thumb piece and completely swinging out the cylinder, and (4) looking and feeling each chamber to confirm the revolver is empty.

FIREARMS SAFETY SYSTEMS

Firearms safety is supported by a system. With your revolver, the system is made up of the following:

You! Your involvement in safety cannot be overemphasized. No safety component can keep your finger off the trigger and the muzzle pointed in a safe direction. Also, you are the key to never trusting any of the mechanical parts of the safety system.

Revolver Be sure the firearm is completely unloaded and contains no cartridges or cartridge cases. With the thumb of the right hand push the thumb piece forward. Then press on the cylinder to swing it to the left. Visually check that all chambers are empty.

Trigger Guard. This is a physical obstruction that helps prevent unintended pressing of the trigger or trigger safety. Do not modify the trigger guard.

This Manual. Taurus intends for you to use this manual to learn about your revolver and to help you use your revolver safely. If you use the manual, you will go a long way toward being a knowledgeable and safe firearms owner.

On Line Resources. TaurusUSA.com hosts a library of videos concerning safety and related issues. This library is being added to and revised. Please visit the site and take advantage of what is available there as part of your education regarding using your Taurus revolver in a safe fashion.

PISTOL AND REVOLVER SIZE AND SAFETY

The selection of a revolver versus a pistol as well as the size, caliber and magazine capacity of a handgun are personal choices. There are many choices to be made, and there are advantages and disadvantages for each.

Generally speaking, smaller handguns may require more attention to be handled safely than medium or full-size handguns. This is because their small size makes it easier to point the muzzle at your hand or to "sweep" (swing the muzzle across your body) yourself or others in ordinary handling.

When loading the cylinder keep the muzzle pointed in a safe direction.

SAFE CARRY CONDITION

"Safe Carry Condition" is the most ready-to-fire condition that the user feels is reasonable under the circumstances.

Generally, we believe Taurus revolvers should be carried with an empty chamber under the hammer. Under most circumstances, this provides the best balance of readiness and safety.

"Safe Carry Condition" is a judgment call and must be made by the user. Some users routinely face greater threats than others. User's must be aware of their situation and circumstances. Errors in judgment can have dire and tragic outcomes if firearms are present.

CARRYING FIREARMS

Carrying a firearm can be dangerous and puts great responsibility on the person in possession of the firearm. Carrying or handling a firearm makes it more difficult to maintain control over the muzzle and makes it more likely that the firearm may be dropped or bumped, resulting in the firearm discharging. There are advantages and disadvantages to various methods of carrying any firearm. Educate yourself and choose which carry method is best for you and those around you.

In almost all circumstances, it is safest to carry a handgun in a holster designed for that specific handgun. Carrying a handgun in a pocket or in a waistband is always a last choice. Carrying any handgun in a holster that fits the firearm should prevent it from accidentally falling and you from losing control of the muzzle. Generally, we believe Taurus revolvers should be carried with an empty chamber under the hammer. Under most circumstances, this provides the best balance of readiness and safety.

\Lambda WARNING - CARRYING

Do not carry your firearm in any way that might let it fall or be bumped. If a firearm falls or is bumped, it may fire.

🕂 WARNING - HANDLING

If the trigger is held to the rear, the gun can fire if the hammer strikes the transfer bar. Note that it need not be any deliberate effort to pull the trigger. Any situation where the trigger attains its rearward position and permits the transfer bar to be interposed between the hammer and the firing pin can cause the cartridge under the firing pin to discharge. Never drop or strike the revolver. Cocked or uncocked. Carry and handle the revolver in such a manner that the hammer and trigger will not be struck.

NEVER CARRY ANY REVOLVER WITH THE HAMMER COCKED OR THE TRIGGER HELD TO THE REAR

FIREARMS STORAGE AND GUN LOCKS

How you secure your firearms is a personal choice based on the unique circumstances in your home, business or vehicle and the laws of the state where your firearm is located. Any choice you make about securing your firearms will present advantages and disadvantages. You must weigh those advantages and disadvantages and choose which security method is best for you and those around you.

WARNING - LOCKING

Never lock a firearm with a round of ammunition under the hammer. Unlocking a loaded firearm makes it more difficult to maintain trigger discipline and to keep the muzzle pointed in a safe direction.


<u> WARNING</u>

Securing your firearm may inhibit access in a defensive situation and may result in injury or death.

<u> WARNING</u>

Failure to secure a firearm may result in injury or death. Properly securing a firearm means storing your firearm unloaded, decocked and securely locked, with all ammunition in a separate location.

GET TO KNOW YOUR REVOLVER

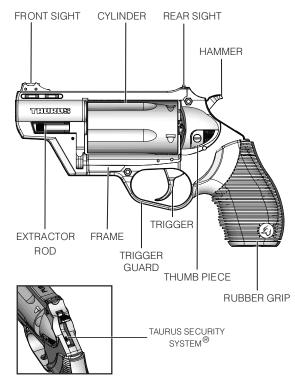

SPECIFICATIONS

Model	410 PD POLY PROTECTOR POLY			
Caliber	.45 COLT/410 Gauge	.38 SPL +P	.357 MAGNUM	
Action	DA/SA DA/SA		DA/SA	
Capacity	5 5		5	
Barrel Length	2.5"	1.875"	2"	
Overall Length	7.6" 6.32"		6.7"	
Weight	27 oz. 16 oz.		19.75 oz.	
Sights (Front)	Fi			
Sights (Rear)	Adjustable for windage Fixed			
Safety Devices	Transfer Bar			
Grips	Rubber			
Finish	Matte Blue or stainless			

LOCKING DEVICE INSTALLATION INSTRUCTIONS

If your Taurus firearm is equipped with TSS (Taurus Security System) and comes with a key, please follow instructions below:

WARNING - LOCKING DEVICES

- Always keep your firearm pointed in a safe direction, including when you are installing or removing your locking device.
- Always verify that your firearm is completely unloaded (see page 22) before installing your locking device.
- Do not install locking devices in the trigger guard; always keep your fingers and locking device outside the trigger guard during device installation and removal.
- Store firearms, ammunition and keys separately and securely, away from children and careless adults; do not store your firearm with the keys in the locking device.
- Do not attempt to work the action of your firearm with the locking device in place; this may damage your firearm.
- While locking devices are an important aid to security measures, they are not a substitute for safe firearm
 handling and proper storage. Remember that any mechanical device can be bypassed with enough time,
 knowledge, determination and equipment.

LOCKING DEVICES MUST BE USED SAFELY AND RESPONSIBLY

The Taurus Revolver is equipped with the exclusive "Taurus Security System." The system is designed to preclude use of the revolver when the mechanism is engaged. It consists of an integral mechanism located in the hammer (Fig.A).

When properly engaged by use of the key, it prevents the functioning of the revolver. The engagement of the mechanism can only be done utilizing a special key that fits the activation pin.


Engagement (secure)


To engage the system, it is necessary to insert the key into the activation pin and turn it clockwise until a "click" is felt or heard (Fig.B). In this position, the revolver's mechanism is locked and the pin protrudes above the surface of the hammer (Fig.1B)

Disengagement (ready-to-fire)


To place the revolver in a firing condition, you must insert the key in the activation pin and turn the key counter-clockwise (Fig.C). In this position the top of the pin is in the same plane with the hammer surface (Fig.1C). The revolver is now ready to fire.











If your Taurus firearm is not equipped with TSS (Taurus Security System) and comes with a cable lock, please follow instructions below:

WARNING - LOCKING DEVICES

- Always keep your firearm pointed in a safe direction, including when you are installing or removing your locking device.
- Always verify that your firearm is completely unloaded (see page 22) before installing your locking device.
- Do not install locking devices in the trigger guard; always keep your fingers and locking device outside the trigger guard during device installation and removal.
- Store firearms, ammunition and keys separately and securely, away from children and careless adults; do not store your firearm with the keys in the locking device.
- Do not attempt to work the action of your firearm with the locking device in place; this may damage your firearm.
- While locking devices are an important aid to security measures, they are not a substitute for safe firearm
 handling and proper storage. Remember that any mechanical device can be bypassed with enough time,
 knowledge, determination and equipment.

LOCKING DEVICES MUST BE USED SAFELY AND RESPONSIBLY

It is important to use the locking device on your Taurus® firearm!

Keep the muzzle pointed in a safe direction and your fingers outside the trigger guard at all times during installation of the locking device!

To Install the Factory-Supplied Locking Device:

- 1. Be sure the firearm is completely unloaded and contains no cartridges or cartridge cases.
- 2. Depress Thumb Piece. Completely swing out the cylinder.
- 3. Feed the cable portion of the cable lock through two opposite chambers in the cylinder (Figure 1).
- To lock: With the key turned to the farthest clockwise position, insert the loose end of the cable into the lock. Turn the key counterclockwise and remove the key.
- 5. Once the lock is securely closed, pull firmly on the lock to test the connection and be sure it is locked. Do not leave or store your firearm with the key in the lock! Store your locked, unloaded firearm and the key in secure, separate locations, away from ammunition, children, and unauthorized adults.





WARNING

Using the wrong ammunition in your revolver can result in serious bodily injury and damage to your revolver. Make certain the ammunition you load is the same caliber as is marked on the revolver.

MARNING - AMMUNITION AND INDUSTRY STANDARDS

Use only clean, dry factory-loaded ammunition. Old, damaged, wet or oily ammunition may fire at pressures higher than industry standard, causing injury to you and bystanders or damage to your revolver.

Do not use reloaded ammunition in your revolver. Its firing pressures are unknown and may well exceed industry standard, causing injury to you and bystanders or damage to your revolver.

Odd sounds are signs of trouble. If a round "does not sound right" when it goes off, stop firing right away. A bullet may be stuck in the barrel. Firing the revolver in this condition may cause pressures higher than industry standard, causing injury to you and bystanders or damage to your revolver.

If you hear any odd sounds when firing your revolver, stop firing, and unload the revolver in accordance with the procedure in this manual. Once unloaded and all cylinders are empty and clear, with the cylinder open, inspect the bore. If you don't see light, there is something stuck in the bore. Do not fire the revolver again and take the revolver to a qualified gunsmith or contact the Taurus[®] Service Department at 800-327-3776.

WARNING - LEAD AND HAZARDOUS CHEMICAL EXPOSURE

Discharging firearms in poorly ventilated areas, handling, and /or cleaning firearms or handling ammunition can expose you to chemicals including lead which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov

Have adequate ventilation at all times. Wash hands thoroughly after exposure with soap and water.

SHOOTING OR CLEANING GUNS MAY EXPOSE YOU TO LEAD

"+P" ammunition can be dangerous. There is a detailed discussion about "+P" and "+P+" ammunition on page 20 of this manual. Until you have read that information, do not fire any ammunition marked "+P" in your revolver.

Never fire ammunition marked "+P+" in your revolver. It does not comply with industry standards as to chamber pressures.

WARNING

It is DANGEROUS to fire "+P+" ammunition in any Taurus[®] firearm, and doing so may result in serious bodily injury or death. The Sporting Arms and Ammunition Manufacturers Institute (SAAMI) does not recognize any "+P+" ammunition at all. These loads operate at unknown pressures.

There are only four calibers that can carry a "+P" rating from SAAMI. They are .38 Special +P, 9mm Luger +P, .38 Super Automatic and .45 Automatic +P. There are no other SAAMI approved "+P" loads. Any ammunition in any other caliber marked "+P" is not SAAMI compliant, may be dangerous and should not be used.

Only fire SAAMI rated Plus P ("+P") ammunition in Taurus[®] models designated by Taurus for +P use as below. Firing +P ammunition in other Taurus products may be dangerous and can result in serious bodily injury or death.

Model 85 small-frame revolver in .38 Special. Model 856 revolver in .38 Special. Model 850 small-frame revolver in .38 Special. Model 851 small-frame revolver in .38 Special. Model 85 Polymer small-frame revolver in .38 Special. Model 82 medium-frame revolver in .38 Special. Model 817 compact frame (tracker) revolver in .38 Special. All firearms chambered in .38 Super Automatic. All firearms chambered in .45 Automatic (ACP). All firearms chambered in 9mm Luger.

NOTICE

Even if your Taurus[®] firearm is rated for Plus-P ("+P") ammunition, such ammunition generates pressures significantly in excess of the pressures associated with standard ammunition. Such pressures may affect the useful life of the firearm or exceed the margin of safety built into many firearms. Unless you need +P ammunition, do not use it, particularly for practice.

NOTICE

You can use .38 Special ammunition in all Taurus[®] revolvers chambered for .357 Magnum; .44 Special ammunition in Taurus revolvers chambered for .44 Magnum and .45 Long Colt in Taurus revolvers chambered for .454 Casull. Note that these are the only caliber substitutions that will function. Attempting to substitute other calibers can damage your firearm and may result in accidental death or serious injury.

FIREARMS ARE NOT ALL ALIKE

Many makes and models of firearms might LOOK nearly the same. However, they differ widely in design, operation, and in the location and function of various controls. You may access the Taurus[®] website at TaurusUSA.com to view and print manuals.

\Lambda WARNING - ANY GUN MAY FIRE IF DROPPED

If dropped or struck, the revolver may fire. Keep the cylinder empty unless actually firing!

<u> WARNING</u>

If dropped or struck the firearm should be inspected by a trained armorer/gunsmith for a complete function check. After the firearm was dropped or struck, mechanisms, including automatic safeties, may not function as intended resulting in accidental death or serious injury.


OPERATING INSTRUCTIONS


The Taurus polymer revolver has a swing out type cylinder with five chambers, turning around a central axis which allows you to fire five shots. When the cylinder is locked in position, the revolver is ready for firing. The shots may be fired by single action (by cocking the hammer, and thereafter pulling the trigger) or by double action (by merely pulling the trigger). Cocking the revolver in both single and double action causes the cylinder to advance, aligning in succession, each of the chambers with the barrel. The cadence of shooting is limited by the shooters skill in loading the cylinder and his ability in operating the gun.


LOADING THE CYLINDER

With the thumb of the right hand, push the thumb piece forward and at the same time press the cylinder, swinging it out to the left. Holding the gun with the muzzle pointing downward and the cylinder in its outermost position, insert the cartridges.

Once loaded, the cylinder must be closed again to its original position in the frame. Then check to ensure the cylinder is locked in place. To unload the revolver, the process is the same as to load it, but after opening, the barrel is pointed upward. Cartridges are then ejected by pressing sharply on the extractor rod. Be sure that all fired cartridges are ejected. The cylinder is now ready to be reloaded.







Spent cases will be hot and may have sharp edges. Exercise caution when removing the cases or injury may occur.

\Lambda WARNING - FIRING






When firing any revolver be sure all persons are a safe distance to the rear of the shooter. When fired, all revolvers discharge hot gas and particles through the clearance gap between the cylinder and rear of the barrel during normal use.

When firing any revolver always be certain that nothing including your hands, fingers, and any body parts are not in the path of hot gases and particles which are discharged from the front and sides of the cylinder.

HOT GASES EXIT BARREL/CYLINDER GAP

ADJUSTING THE SIGHTS

On Model 410 PD POLY the sight blade may be adjusted for windage. To adjust, make sure the firearm is unloaded and always keep the muzzle pointed in a safe direction. If possible, leave the cylinder open during adjustment. Locate the adjustment screw on the top of the right side of the frame. Turn the adjustment screw clockwise to move the notch to the left side, and counter-clockwise to move the notch to the right side.



CARE AND MAINTENANCE

Before cleaning, (1) keep the muzzle pointed in a safe direction, (2) keep your finger off the trigger, (3) depress the thumb piece and completely swing out the cylinder, and (4) ensure the firearm is completely unloaded by looking and feeling each chamber.


The firearm may be cleaned and lubricated under normal conditions without any disassembly steps. For optimal performance, we recommend you clean and lubricate your firearm at least after every 200 rounds fired through the firearm. At the same time check for any loose screws or pins. Tighten the screws and press pins in as needed.

To keep a firearm safe and in good working condition, it must be kept clean and covered with a light film of good quality gun oil to prevent corrosion. The barrel bore should be cleaned and left free of debris. Follow these steps:

- Remove excessive firing residue from the bore and chamber using a properly fitted brass brush dipped in a gun cleaning solvent. Finish the bore cleaning process by running a dry cotton cloth patch through the bore to remove any remaining residue and solvent.
- Clean the exterior of the firearm, using a non-abrasive cleaning cloth. Remove dust and residue from small crevices using a small brush.
- After cleaning, rub the revolver with a lightly oiled cloth.

Please note that a firearm with laser should not be cleaned in a well or supersonic machine that submerges the firearm as this can damage the laser system.

Intentionally left blank

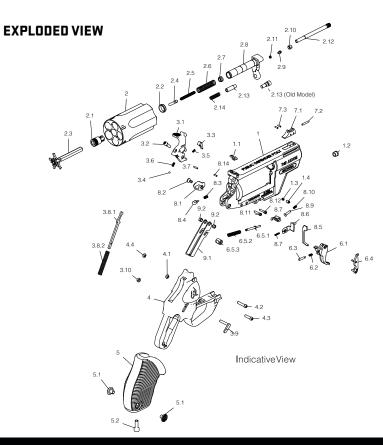

PART LIST

EDAME	0.0		8.
			8
			8
			8.
			9
			9
012110211011			9
			9.
	-		
		=	
			/
	7.3	FRONT SIGHT PIN	
HAMMEB	8.1	THUMB PIECE	
KEY LOCK	8.2	THUMB PIECE SCREW	
SEAR	8.3	FIRING PIN SPRING	
KEY LOCK BALL	8.4	FIRING PIN	
SEAR SPRING	8.5	TRANSFER BAR	
KEY LOCK SPRING	8.6	BOLT	
KEY LOCK PIN	8.7	BOLT SPRING	
MAIN SPRING ASSEMBLY	8.8	CYLINDER STOP	
MAIN SPRING CENTER PIN	8.9	CYLINDER STOP PLUNGER	
MAIN SPRING	8.10	CYLINDER STOP SPRING	
	REAR SIGHT ADJUSTING SCREW CYLINDER 5R CYLINDER RETAINING BUSHING CYLINDER DISTANCE BUSHING EXTRACTOR CENTER PIN CENTER PIN SPRING EXTRACTOR SPRING WITH ROD COLLAR EXTRACTOR SPRING RING YOKE LOCKING BOLT YOKE LOCKING BOLT YOKE LOCKING BOLT HOUSING YOKE RETAINING PIN SPRING EXTRACTOR CENTER PIN CYLINDER YOKE AXIS YOKE PLUNGER GUIDE SPRING YOKE PLUNGER GUIDE SPRING YOKE PLUNGER GUIDE HAMMER KEY LOCK SEAR KEY LOCK BALL SEAR SPRING KEY LOCK SPRING KEY LOCK PIN MAIN SPRING ASSEMBLY MAIN SPRING CENTER PIN	REAR SIGHT3.10YOKE SCREW CAP4REAR SIGHT SPRING4.1REAR SIGHT ADJUSTING SCREW4.2CYLINDER SR4.3CYLINDER DISTANCE BUSHING5.1EXTRACTOR5.2CENTER PIN6CENTER PIN SPRING6.1EXTRACTOR SPRING WITH ROD COLLAR6.2EXTRACTOR SPRING RING6.3YOKE6.4YOKE LOCKING BOLT6.5YOKE LOCKING BOLT HOUSING6.5.1YOKE RETAINING PIN SPRING6.5.2EXTRACTOR CENTER PIN6.5.3YOKE PLUNGER GUIDE SPRING7.1YOKE PLUNGER GUIDE SPRING7.1YOKE PLUNGER GUIDE SPRING7.1YOKE PLUNGER GUIDE7.2HAMMER8.1KEY LOCK SALL8.4SEAR8.3KEY LOCK SPRING8.5KEY LOCK SPRING8.5KEY LOCK SPRING8.6KEY LOCK SPRING ASSEMBLY8.8MAIN SPRING ASSEMBLY8.8MAIN SPRING CENTER PIN8.9	REAR SIGHT3.10HAMMER PIVOT NUTYOKE SCREW CAP4GRIPREAR SIGHT SPRING4.1GRIP SCREW NUTREAR SIGHT ADJUSTING SCREW4.2GRIP SCREW - UPPERCYLINDER 5R4.3GRIP SCREW - LOWERCYLINDER RETAINING BUSHING5RUBBER STOCKCYLINDER DISTANCE BUSHING5.1GRIP MADALLIONEXTRACTOR5.2RUBBER GRIP SCREWCENTER PIN6TRIGGER ASSEMBLYCENTER PIN SPRING6.1TRIGGER SPRING PINEXTRACTOR SPRING WITH ROD COLLAR6.2HAND SPRING PINYOKE6.4HANDYOKE LOCKING BOLT6.5TRIGGER SPRING ASSEMBLYYOKE LOCKING BOLT6.5TRIGGER SPRING ASSEMBLYYOKE RETAINING PIN SPRING6.5.1TRIGGER SPRING CENTER PINYOKE RETAINING PIN SPRING6.5.2TRIGGER SPRING SWIVELCYLINDER YOKE AXIS7FRONT SIGHT ASSEMBLYYOKE PLUNGER GUIDE7.2FRONT SIGHT INSERTHAMMER ASS'Y7.3FRONT SIGHT INSERTHAMMER8.1THUMB PIECEKEY LOCK BALL8.4FIRING PINSEAR8.3FIRING PINSEAR8.4FIRING PINSEAR SPRING8.6BOLTKEY LOCK SPRING8.6BOLTKEY LOCK SPRING ASSEMBLY8.8CYLINDER STOPMAIN SPRING ASSEMBLY8.8CYLINDER STOP PLUNGER

 8.11
 TRIGGER SCREW

 8.12
 CYLINDER STOP SCREW

 8.13
 FIRING PIN BUSHING

 8.14
 FIRING PIN

 9
 HAMMER SUPPORT

 9.1
 MAIN SPRING SUPPORT

 9.2
 HAMMER PIVOT BUSHING

TAURUS SERVICE

Should your firearm require adjustment or repair contact our Customer Care department at 800-327-3776.

Please follow these suggestions to expedite service in the United States to return any firearm to us for adjustment or repair.

1. Federal law permits you to return your firearm to the manufacturer for service via common carriers. However, state and local firearms laws vary greatly; you should consult your local prosecuting attorney regarding any restrictive laws in your jurisdiction regarding your shipment or receipt of firearms. With the above in mind, it is strongly recommended that any firearm sent to us for repair be sent through a federally licensed dealer.

2. All firearms must be shipped to us prepaid. WE WILL NOT ACCEPT COLLECT SHIPMENTS.

3. Warranty Service: If your product is covered under the Taurus[®] Limited Lifetime Warranty (https:// warranty.taurususa.com) or was manufactured prior to January 1, 2017, you must contact Taurus to receive warranty service. You may contact Taurus by calling 800-327-3776, logging onto https://taurususa.com, or in writing: Taurus, Attn: Warranty Service, 100 Taurus Way, Bainbridge, GA 39817. Please include a description of the claimed defect, along with your name, address, telephone number, model and serial number of your firearm, proof of purchase, and date of purchase.

4. FIREARMS MUST BE SHIPPED UNLOADED. Double check the chambers of your firearm before shipping. If firearms are sent to Taurus in a loaded condition, we are required by law to notify the Federal authorities.

5. DO NOT include telescopic sights, custom grips, holsters, or other accessories with any firearm shipped to us.

PARTS

Firearms require periodic maintenance, inspection, adjustment and repair. If your revolver has a malfunction, be safe. Stop firing, "clear" and unload the revolver and take it to a qualified gunsmith. Before shooting it again, contact our Customer Care department if you have any questions.

If water, sand, or other foreign matter gets in your revolver, thoroughly clean it. Failure to keep your firearm clean and in proper working order can be dangerous.

Our Customer Care department maintains a full stock of replacement parts for current Taurus firearms. Even though most gunsmiths have the knowledge, training and ability to make the necessary repairs to your firearm, the skill and workmanship of any particular gunsmith is totally beyond our control. Should your firearm require service, return it to our Customer Care department.

Remember, unauthorized adjustments or parts replacement can void your warranty. If you choose to have someone else do the required work, the purchaser and/or installer of parts must accept full responsibility for the correct adjustment and function of the firearm.



TAURUS® LIMITED LIFETIME WARRANTY

Taurus hereby provides the following LIMITED LIFETIME WARRANTY, to the original purchaser of the enclosed Taurus[®] firearm subject to the terms and conditions set forth below. THIS IS THE ONLY WARRANTY EXTENDED BY TAURUS COVERING THIS FIREARM.

What does the warranty cover and what is its duration?

Taurus warrants to the original purchaser that the enclosed firearm was made free of defects in material, function, and workmanship. Taurus promises to remedy any defect in material, function or workmanship for the entire time that the original purchaser owns the firearm. This warranty covers the firearm's finish, grips, magazines, sights or accessories for the first year. Any claims of defect related to lasers must be directed to the manufacturer of the laser. This warranty terminates automatically upon the transfer of this firearm to any individual or entity other than the original purchaser.

Disclaimer and Limitation of Remedy.

ANY IMPLIED WARRANTIES OF MERCHANTABILITY IMPARTED BY STATE LAW WILL BE LIMITED TO ONE (1) YEAR.

Some States do not allow limitations on how long an implied warranty lasts, so the above-limitation may not apply to you.

ANY AND ALL INCIDENTAL AND CONSEQUENTIAL DAMAGES ARE EXPRESSLY DISCLAIMED UNDER ALL CIRCUMSTANCES.

Some States do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This **LIMITED LIFETIME WARRANTY** gives you specific legal rights, and you may also have other rights which vary from State to State.

Taurus will not be responsible for:

- 1. Defects or malfunctions resulting from careless handling, unauthorized adjustments or modifications.
- 2. Use of defective or improper ammunition, reloaded ammunition, corrosion, neglect, abuse, ordinary wear and tear or unreasonable use.
- 3. Criminal misuse, negligence or use under the influence of drugs or alcohol.

How do you obtain warranty service?

The warranty becomes effective only if activated by the original purchaser within thirty (30) days of the purchase date by registering online at: https://warranty.taurususa.com or by calling Taurus at 800-327-3776.

You must contact Taurus to receive warranty service. You may contact Taurus by calling 800-327-3776, logging onto https://taurususa.com, or in writing: Taurus, Attn: Warranty Service, 100 Taurus Way, Bainbridge, GA 39817. Please include a description of the claimed defect, along with your name, address, telephone number, model and serial number of your firearm, proof of purchase, and date of purchase.

IMPORTANT DO NOT DISCARD

KEEP THIS MANUAL WITH THE FIREARM UPON CHANGE OF OWNERSHIP.

TAURUS ARMAS S.A. Av. São Borja, 2181 – Prédio A São Leopoldo/Fazenda São Borja Rio Grande do Sul 93.035-411 Brasil

TAURUS INTERNATIONAL MANUFACTURING, INC.

100 Taurus Way Bainbridge, GA 39817 Telephone: 1-800-327-3776

TAURUSUSA.COM TAURUS.COM.BR

045-0026-00 Rev.1